


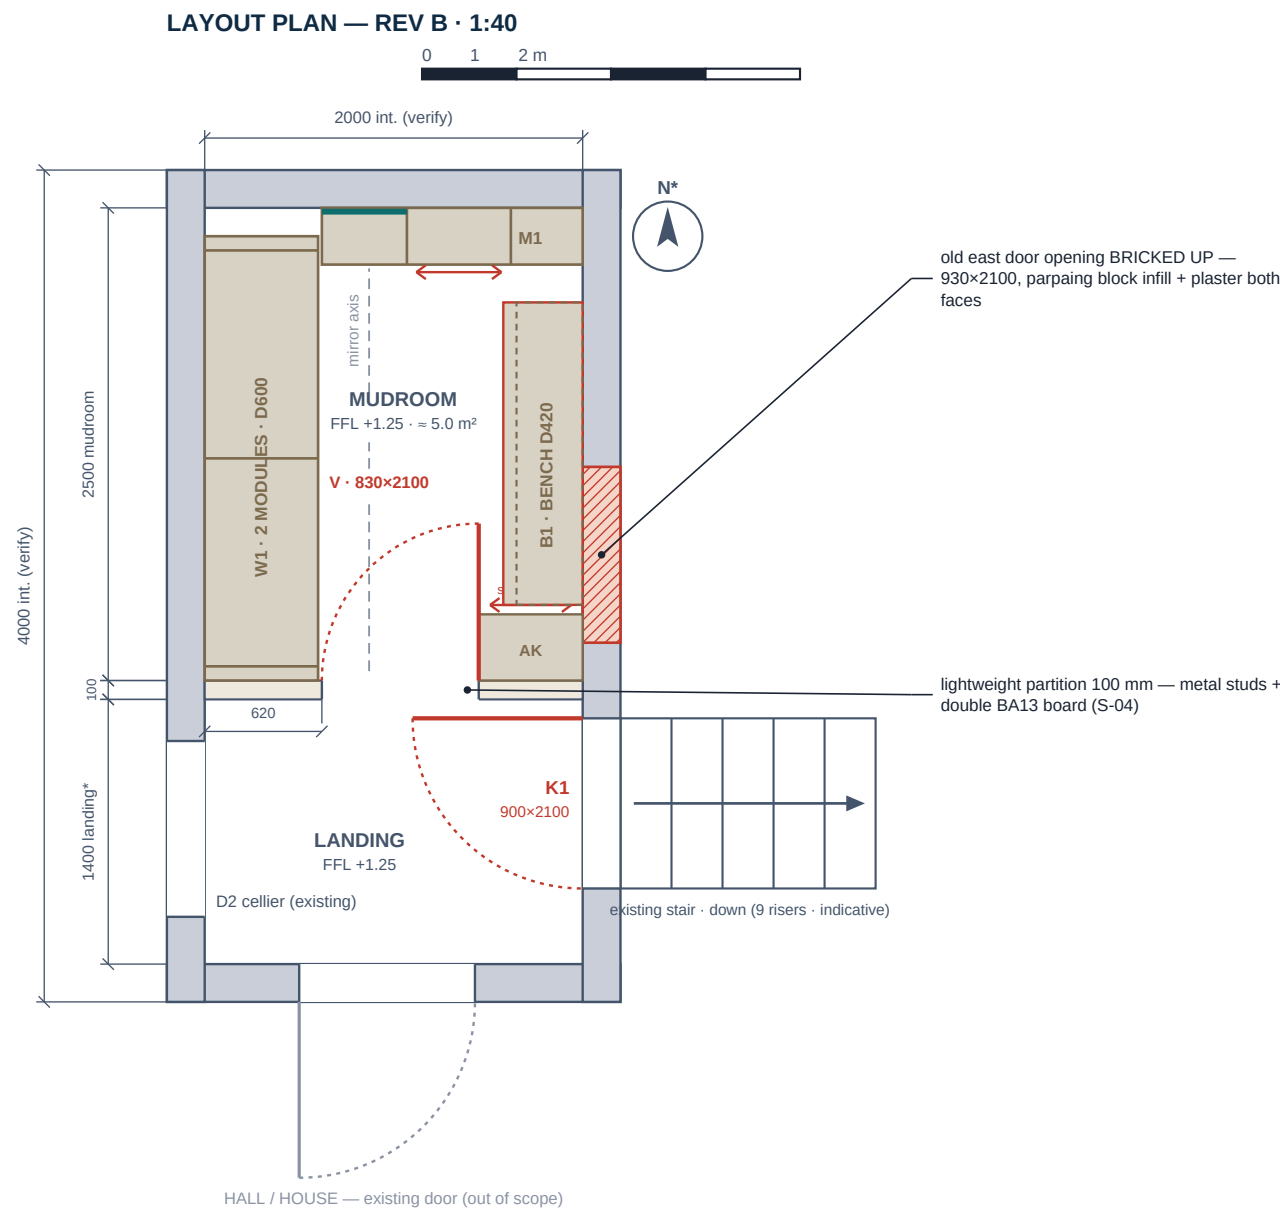

S-01 NOTES

- Rev B layout: LANDING (2000×1400*) + lightweight partition (100) + MUDROOM (2000×2500). Wall/floor works are in the main pack; this set defines the joinery + partition + door swings.
- *Landing depth 1400 mm is an ASSUMPTION — not legible on the plan; fixed on measurement day.
- Old east (stair-side) door opening DELETED — bricked up; the east wall is given over to bench B1.
- K1: glazed thermal-break aluminium exterior door 900×2100 · Uw ≤ 1.6 · RC2 lock · self-closing hinges.
- V: 830×2100 timber interior door (Faz 4.2); 620 mm off the west wall (in line with the W1 front) — a person entering sees the mirror (M1) ahead. (Phase 4.1: a 930 leaf could not open on either hinge side — geometry lint record.)
- The shoe tower (AK) and M1 tower fronts are DOUBLE-TRACK SLIDING doors (zero swept volume) — hinged doors struck the bench end / bench corner (Phase 4.1 fix).
- Glazing band CANCELLED (owner decision, Faz 4.2) — the east wall is built SOLID; daylight via the K1 glazed leaf.
- The existing stair is drawn with 9 risers as INDICATIVE — count and sizes to be verified on site (dimensions.stair, verified:false).
- All dimensions in mm; levels in metres. Jute runner and loose hardware are out of scope.

DOOR SWING RATIONALE (dimensions.json · swing_rationale)

- K1 must not swing OUT over the stair: it would push the person opening the door towards the stair void and the leaf would strike anyone coming up — fall hazard. K1 therefore opens IN onto the LANDING; self-closing hinges stop it slamming in the wind.
- K1 is hinged on the north jamb: the open leaf parks against the landing's north wall (the partition); it obstructs neither the house door nor the passage.
- Because the landing is narrow (1400), door V opens into the MUDROOM, not the landing; hinge on the EAST jamb — the leaf opens a full 90° and parks on the east side, keeping the entry axis (door → mirror), the W1 doors and wardrobe access clear. (A west hinge was geometrically impossible: W1, 600 deep, sits flush against the partition — the leaf would strike its side panel corner at ~18°.)
- W1 door pairs hinge on the OUTER stiles with pulls meeting at the module centre; the north-end door/top box has an 80° stop (M1 flange) — corner rule: doors open AWAY from the corner.
- Even with both doors open at once, the leaves stay in different volumes — there is no clash scenario. The existing house/hall door is unchanged (out of scope).

LEGEND

- existing wall
- new works / masonry infill
- light partition (plasterboard)
- joinery (this package)
- mirror / glazing

CAD: output/CAD/S01_Yerlesim.dxf (Rev B, mm 1:1) — same geometry as this sheet.

ORANGE MUDROOM CONVERSION — SHOP DRAWINGS (REV B)

SHEET	SCALE	DATE	REV
S-01 · Layout Plan (Rev B)	1:40 @ A3	July 2026	B

SITE MEASUREMENT BEFORE FABRICATION IS MANDATORY — never fabricate from plan dimensions.




W1 ELEVATION (LOOKING WEST) · 1:20 — 2 double-door modules 1100 · doors 1950 + top boxes · carcass depth 600

S-02 NOTES


- Carcasses 18 mm moisture-resistant MDF; doors 22 mm MDF shaker, PU lacquer greige ≈ RAL 7044 matt.
- *Top boxes are the tolerance zone: if the soffit comes in low, the top boxes shorten — the 1950 doors are fixed.
- Hinges: Blum Clip-top 110° soft-close — 3 per tall door, 2 per top-box door (W1 total 20 pcs).
- Pulls: on every door; vertical at level @1000 on tall doors, horizontal near the bottom edge on top boxes (W1: 8 pcs).
- Internals: module A long hang (rail @1800) · module B double rail (@950 / @1850).
- Plinth 100 mm on adjustable feet; skirting clip-fixed, removable.
- Scribe pieces 75 mm nominal, both ends — cut to the wall on site (±15 mm allowance).
- The north side panel is the abutment for unit M1 (S-03); door leaf V parks against the south side panel — these faces get scratch-resistant lacquer, with a felt-padded stop block on the leaf side.
- Rear fixing rails anchored to the block wall with plugs — never to plasterboard alone.

CAD: output/CAD/S02_W1_Gorunus.dxf (Rev B — 2 modules, mm 1:1).


ORANGE MUDROOM CONVERSION — SHOP DRAWINGS (REV B)			
SHEET	SCALE	DATE	REV
S-02 · W1 Wardrobe Wall — Elevation (Rev B)	1:20 @ A3	July 2026	B
SITE MEASUREMENT BEFORE FABRICATION IS MANDATORY — never fabricate from plan dimensions.			

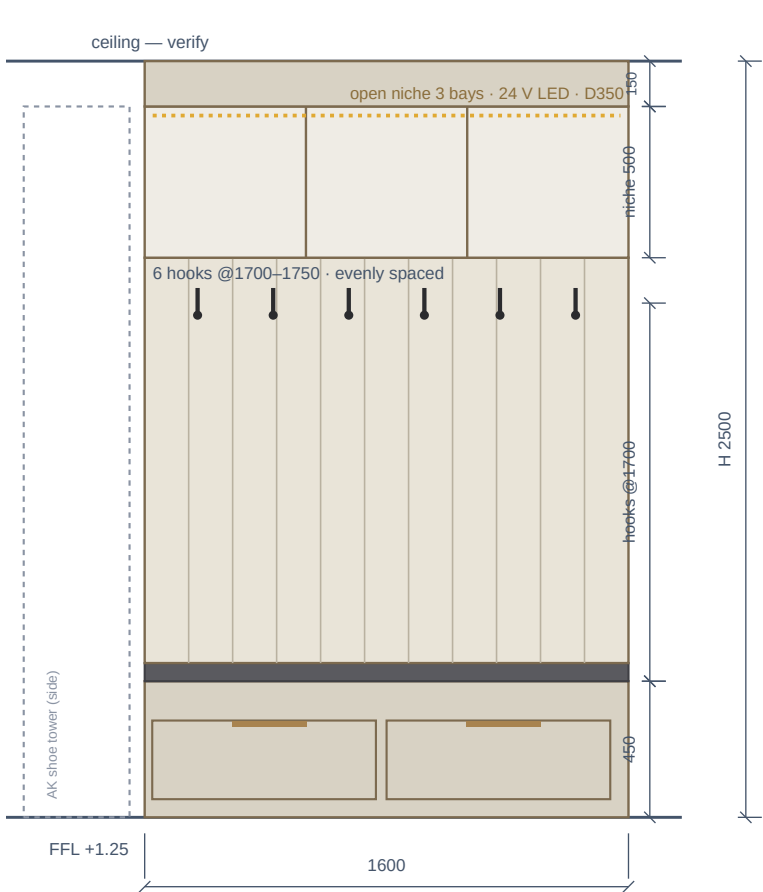

B1 ELEVATION (LOOKING EAST) · 1:25
east wall — full wall now the old door is bricked up; 2 Tandembox drawers
glazing band CANCELLED (owner decision, Faz 4.2) — east wall solid; daylight via K1 glazing

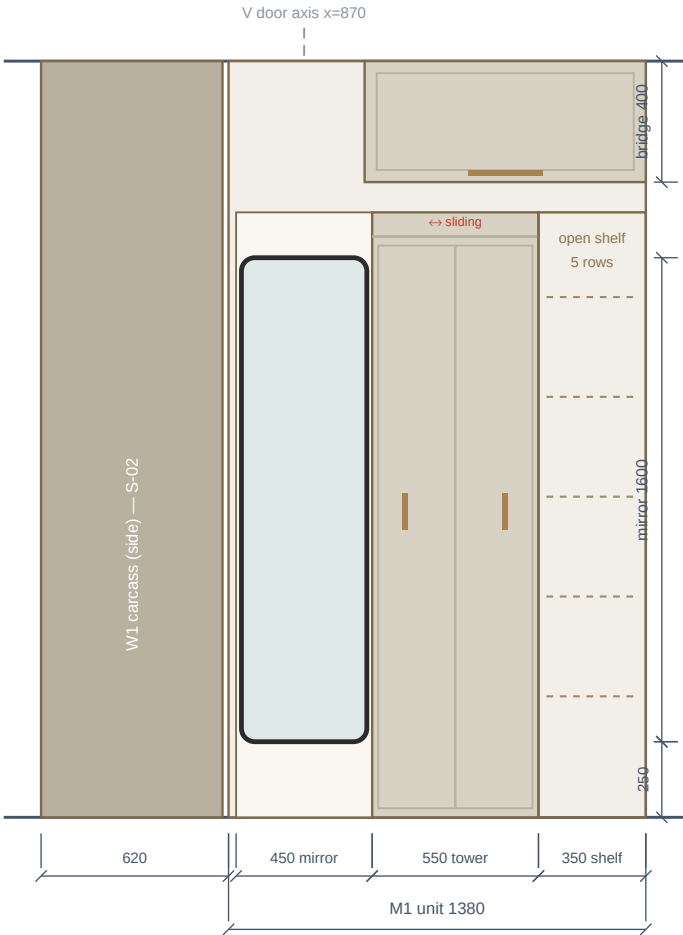

M1 MIRROR WALL — NORTH WALL ELEVATION · 1:25
recessed mirror on the V door axis — seen straight ahead on entry; west side is the W1 side panel

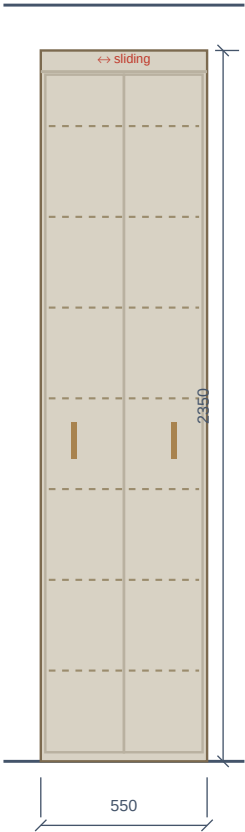

SHOE TOWER · 1:25
550×350×2350 · 10 pairs · looking south · SLIDING front (Phase 4.1)

S-03 NOTES

- Bench carcass 1600×450×420; 60 mm upholstered cushion on top (smoke grey); 2 Blum Tandembox drawers.
- Coat panel from bench top to niche underside; 6 hooks @1700–1750, matt black.
- Niche band 1850–2350: 3 bays, D350; 24 V 3000 K LED under the shelf (2.0 m total), driver in the top filler.
- M1: recessed mirror 450×1600 (bottom level +250) on the V door axis x=870; tower 550×2000 with a DOUBLE-TRACK SLIDING 2-panel front (Phase 4.1: a hinged leaf swept the bench corner; track/pulls recessed, face flush); corner open shelf 350, 5 rows; top bridge 930×400, x 1070–2000, level 2100–2500 (Phase 4.1: OPEN above the mirror — W1 north door swings pass free underneath).
- The west side of M1 bears on the north side panel of the W1 carcass (620 line) — no separate side panel needed.
- Shoe tower 550×350×2350 (10 pairs) on the mudroom face of the partition, east end, flush to the east wall; DOUBLE-TRACK SLIDING 2-panel front (Phase 4.1: the hinged door struck the bench end — 100 mm; sliding sweeps nothing, front access kept); anti-tip restraint to the partition only.


CAD: output/CAD/S03_B1_Gorunus.dxf (Rev B) —
same geometry as this sheet (mm 1:1).

ORANGE MUDROOM CONVERSION — SHOP DRAWINGS (REV B)


SHEET	SCALE	DATE	REV
S-03 · B1 Bench + M1 Mirror Unit + Shoe Tower (Rev B)	1:25 @ A3	July 2026	B
SITE MEASUREMENT BEFORE FABRICATION IS MANDATORY — never fabricate from plan dimensions.			

S-04 NOTES

- Sections are typical; fabrication dimensions come from the cutting list (revised after shell works).
- All visible edges PU-lacquered; concealed edges edge-banded.
- Niche interiors carcass-colour melamine; LED channel set back 30 mm from the shelf front edge.
- Partition: DC50 metal studs @600, 2 layers of BA13 on both faces, 45 mm mineral wool (acoustic); heated volume on both sides — no thermal insulation required.
- Door frame V screws to doubled studs in the partition; U-profile head track as lintel above the frame.
- On the wall side an 18 mm back panel; anchor screws run through the panel into the wall.

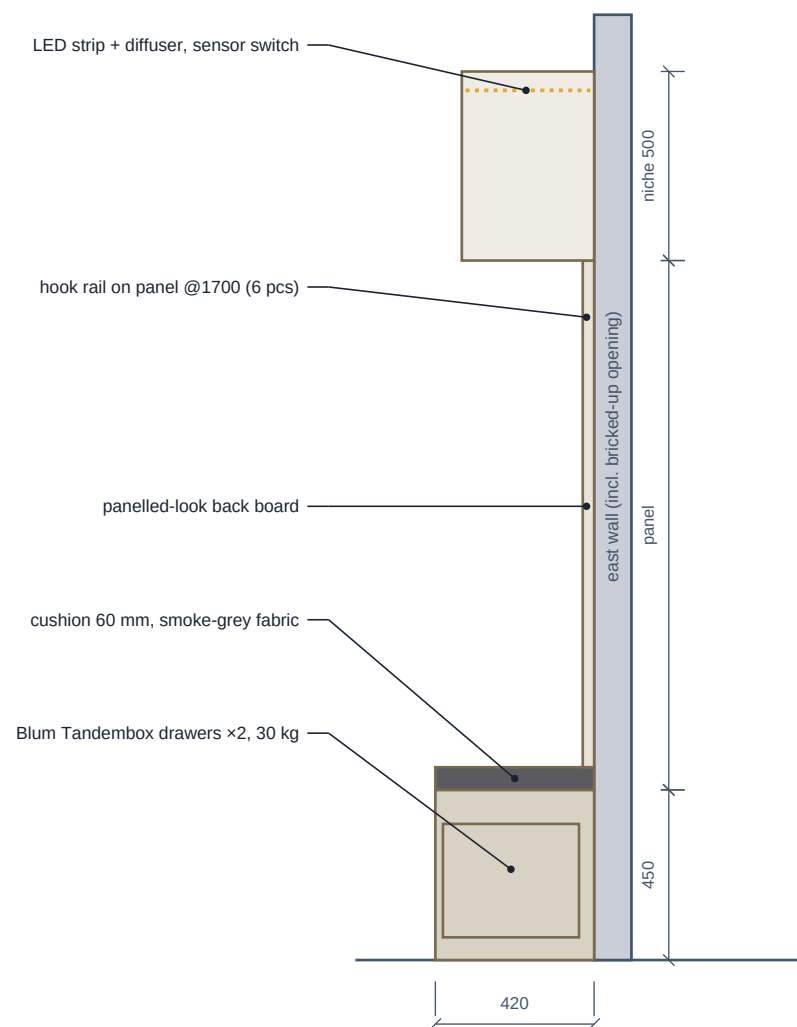


SECTION 1 — BENCH WALL B1 · 1:20

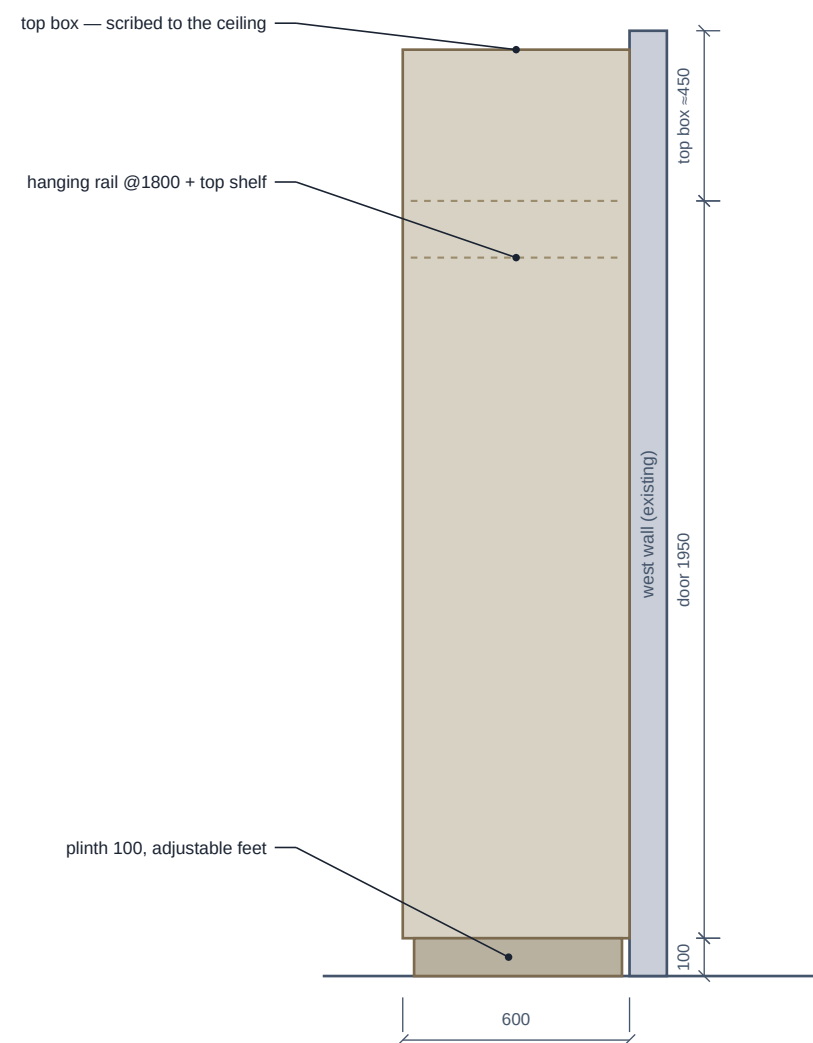

SECTION 2 — TALL WARDROBE W1 · 1:20

DETAIL — LANDING-MUDROOM PARTITION (PLAN SECTION) · 1:5

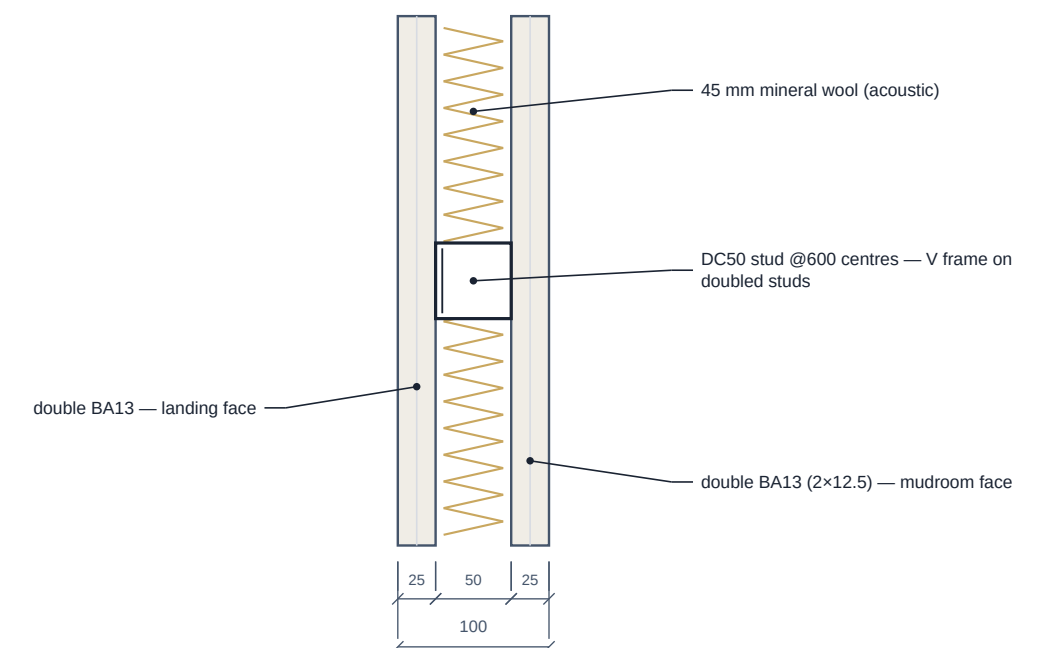

ORANGE MUDROOM CONVERSION — SHOP DRAWINGS (REV B)

SHEET	SCALE	DATE	REV
S-04 · Sections — Bench, Tall Wardrobe, Partition Wall (Rev B)	1:20 / 1:5 @ A3	July 2026	B
SITE MEASUREMENT BEFORE FABRICATION IS MANDATORY — never fabricate from plan dimensions.			

HARDWARE & MATERIAL SCHEDULE — REV B QUANTITIES

Component	Specification
Carcass	18 mm moisture-resistant MDF, edge-banded; backs 8 mm in grooves
Doors & fronts	22 mm MDF shaker, PU lacquer greige ≈ RAL 7044, matt
Hinges	Blum Clip-top 110° soft-close — 3 per tall door, 2 per top-box door · W1 ONLY: 4 tall × 3 + 4 top-box × 2 = 20 pcs (M1 tower and shoe tower are SLIDING in Phase 4.1 — no hinges)
Sliding sets	Double-track bypass sliding set (top track + bottom guide + damper), 2 panels — 1 set for the M1 tower + 1 set for the AK shoe tower; hardware in their own BoQ items (A.6/A.7)
Drawers	Blum Tandembox, full extension, soft-close, 30 kg — bench B1 2 sets
Lighting	24 V 3000 K LED strip 2.0 m (B1 niche band) + driver 1 + sensor switch 1
Plinth & feet	100 mm plinth, adjustable feet (14 pcs); clip-fixed, removable
Scribes	75 mm scribe pieces (both ends of W1), cut on site (≈ 5 lin. m)
Pulls	Brushed antique brass or matt black, 128–160 mm centres — 10 pcs, W1+B1 ONLY (W1 doors 8 + B1 drawers 2; M1 tower/bridge pulls in their own BoQ item)
Hooks	Matt black double hooks — 6 pcs, @1700–1750 (B1 panel)
Mirror	450 × 1600, black metal frame, recessed into the M1 niche — 1 pc
Partition wall	DC50 metal studs @600 + 2 layers BA13 both faces + 45 mm mineral wool — 100 mm total (S-04)
Joints	Dowel + cam (CNC); wall anchors plugged, ≥ 4 per carcass

FABRICATION RULES

- The cutting list will be revised to the laser survey issued by the client at the end of the shell works; fabrication must not start from plan dimensions.
- Walls are not assumed plumb: scribe pieces carry ±15 mm tolerance; joinery is never made zero-clearance to nominal masonry dimensions.
- All cut MDF edges are sealed (PU lacquer or edge-banding) — this is a wet-shoe room.
- Panels are numbered by module (W1-A/B, B1, M1, AK shoe tower) and the assembly diagram matches the PDF.
- Packing: edge protectors + foam interlayers + moisture barrier + export pallet; ≈ 40 kg limit per panel.
- Hardware bagged per module + 5% spares; Blum parts in their original boxes.
- QC: photos of every module sent to the client before wrapping; wait for approval.
- Lacquer colour approval: 1 sample door + RAL swatch sign-off is mandatory before series production.

REFERENCES — REV B

Single source of truth: data/dimensions.json (Rev B, verified:false) · Design context: Orange_Mudroom_Conversion_Pack_A3.pdf · Tender file: lhale_Dosyasi_Vestiyer_TR.pdf (Turkish).

Rev B quantities W1+B1 ONLY: 4 tall doors + 4 top-box doors + 2 drawers · 20 hinges (W1) · 10 pulls (W1 8 + B1 2) · 6 hooks · LED 2.0 m · 14 adjustable feet — M1 tower and shoe tower are SLIDING (Phase 4.1); their sliding sets + pulls are in their own BoQ items (A.6/A.7).

Legacy draft codes: D3 → K1 (landing exterior door), D1 (east door) → DELETED/bricked up; V = mudroom door (in the partition).

ORANGE MUDROOM CONVERSION — SHOP DRAWINGS (REV B)

SHEET	SCALE	DATE	REV
S-05 · Hardware & Material Schedule + Fabrication Rules (Rev B)	— @ A3	July 2026	B
SITE MEASUREMENT BEFORE FABRICATION IS MANDATORY — never fabricate from plan dimensions.			